


## DS-D5022QE-E 21.5" Monitor



### Key Features

- High reliability and stability, 24/7 operation
- LED backlit technology with full HD 1920×1080
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiple outputs: HDMI, VGA
- 16.7 million color, display picture perfectly
- VESA standard
- Plastic casing

### Interfaces

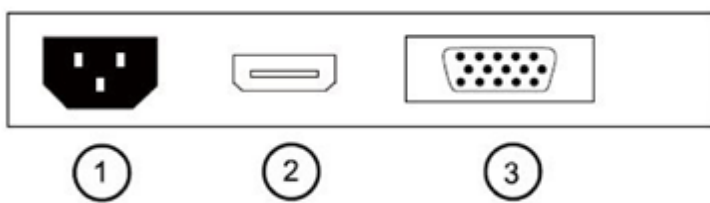

| NO. | Description    |
|-----|----------------|
| 1   | AC Power Input |
| 2   | HDMI Input     |
| 3   | VGA Input      |

### Model


DS-D5022QE-E



## Specifications

|                                  |  |                     |
|----------------------------------|--|---------------------|
| <b>Model</b>                     | DS-D5022QE-E   |                     |
| <b>Backlight</b>                 | TFT-LED Backlight  |                     |
| <b>Screen Size</b>               | 21.5 inch  |                     |
| <b>Pixel Pitch</b>               | 0.24825 mm (H) × 0.24825 mm (V)                                      |                     |
| <b>Max Resolution</b>            | 1920 × 1080@60Hz   |                     |
| <b>Brightness</b>                | 200 cd/m <sup>2</sup>  |                     |
| <b>Contrast</b>                  | 600: 1   |                     |
| <b>Response Time</b>             | 5ms  |                     |
| <b>Color</b>                     | 16.7M  |                     |
| <b>Active Area</b>               | 476.64mm× 268.11mm   |                     |
| <b>Viewing Angle</b>             | Horizontal 90°, vertical 65°   |                     |
| <b>Interfaces</b>                | VGA input  | 1                   |
|                                  | HDMI input   | 1                   |
| <b>Power Supply</b>              | 100 to 240 VAC, 50/60Hz  |                     |
| <b>Power Consumption</b>         | ≤ 30W  |                     |
| <b>Standby Power Consumption</b> | ≤ 0.5 W  |                     |
| <b>Loudspeaker</b>               | NA   |                     |
| <b>Working Temperature</b>       | 0 to 40 °C (32 to 104 °F)  |                     |
| <b>Working Humidity</b>          | 10 to 90 %   |                     |
| <b>Storage Temperature</b>       | -20 to 60 °C (-4 to 131° F)  |                     |
| <b>Storage Humidity</b>          | 5 to 95%   |                     |
| <b>Color of Casing</b>           | Black  |                     |
| <b>VESA</b>                      | M4, 100 mm × 100 mm  |                     |
| <b>Dimensions(W*H*D)</b>         | 511mm × 377mm × 170mm(with base)/ 511mm × 313mm × 46mm               |                     |
| <b>Packing Dimensions(W*H*D)</b> | 565mm × 435mm × 105mm  |                     |
| <b>Gross Weight</b>              | 4.0kg  |                     |
| <b>Net Weight</b>                | 3.2 kg   |                     |
| <b>Accessories</b>               | VGA Cable  | 1                   |
|                                  | Power Cord   | 1                   |
|                                  | User Manual  | 1                   |
| <b>Bracket</b>                   | Pedestal   | Contain 1           |
|                                  | Wall mounted   | Optional DS-DM1940W |
| <b>*Note</b>                     | All specifications mentioned above are subject to the actual product |                     |

## Dimensions (unit: mm)

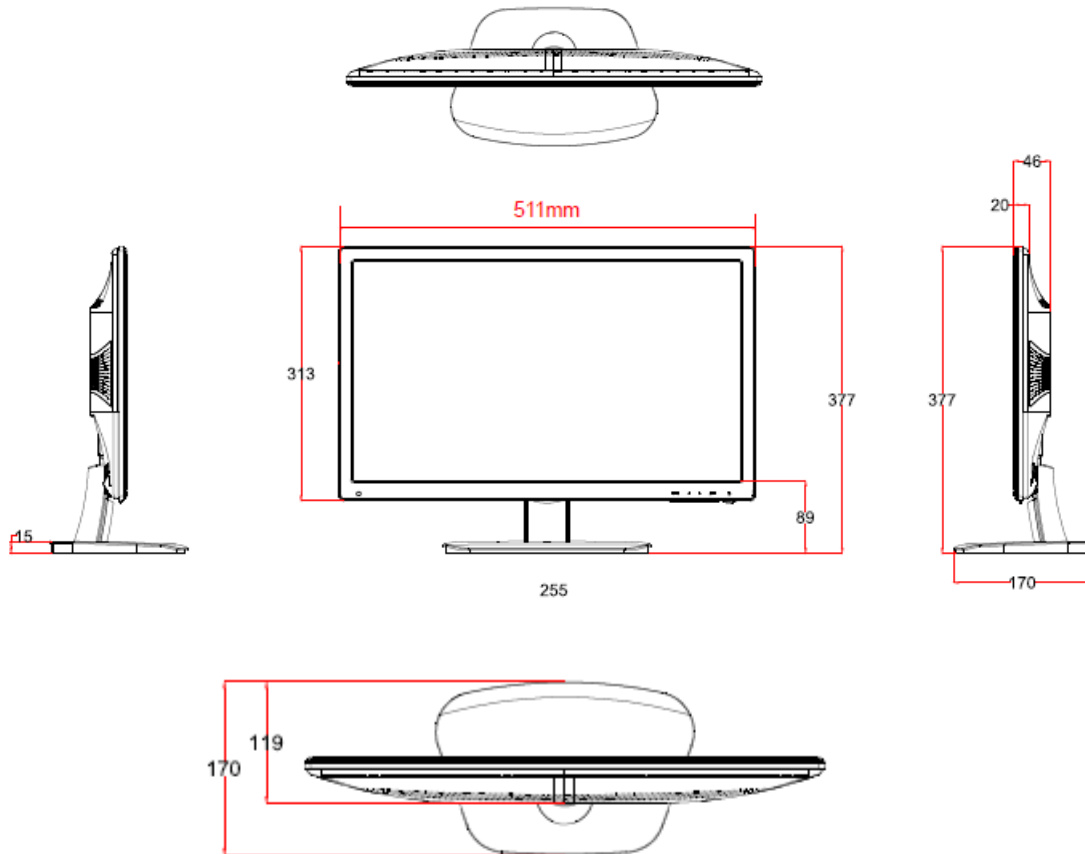


Distributed by



**HIKVISION**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

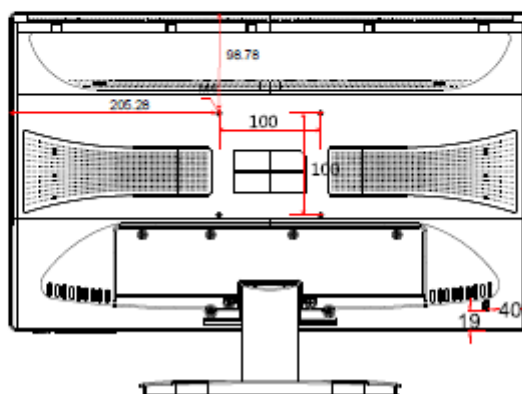

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (0) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com