

DS-D5032FL-B 32-inch PVM MONITOR



Features and Functions

- LED backlit technology with full HD 1920*1080
- Wide view angle: 178°(H)/178°(V)
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction
- Multiply inputs: HDMI, VGA, BNC input, USB, audio in
- Outputs: BNC output, audio out
- Support HD TVI and CVBS signal input
- Build-in speaker
- Image freeze
- Auto input signal source switch
- IR remote control
- Standby during no signal input
- Eco power saving mode
- Dual power supply: 24 VDC or 100 to 240 VAC
- High reliable components for 7 × 24 working hours
- VESA stand bracket




Specifications

Model	DS-D5032FL-B	
LCD Screen	Backlight	LED Backlight
	Dimension	32 inch
	Dot pitch	0.3637 mm × 0.3637 mm
	Max. resolution	1920 × 1080p
	Optimal working resolution	1920 × 1080@60Hz
	Brightness	400 cd/m ²
	Contrast	3000: 01: 00
	Response time	10 ms
	Color	16.7M
	Active Area	698.4 × 392.85 mm
	Viewing Angle	Horizontal 178°, vertical 178°
Interfaces	VGA Input	1
	BNC Input	1
	BNC Output	1
	USB 2.0 Interface	1
	HDMI input	1
	RS-232 interface	1
	IR Receiver	1 (for remot control)
	Audio input	1
	Audio output	1
	General	Casing Material
Color of Casing		Black
Wall-mounting Hole		200 × 200 mm
Wall-mounting Screw		M4
Power Supply		24 VDC; 100 to 240 VAC, 50/60Hz
Power Consumption		≤ 60 W
Standby Power Consumption		≤ 0.5 W
Working Temperature		0 to 40 °C (0 to 104 °F)
Working Humidity		10 to 90 %
Storage Temperature		-20 to 55 °C (-68 to 140 °F)
Storage Humidity		5 to 95%
Dimensions (without base)		737.4 × 452.5 × 70.7 mm (29.0" × 17.8" × 2.8")
Packing Dimensions		881 × 205 × 630 mm (34.7" × 8.1" × 24.8")
Gross Weight		19 kg (41.9 lb)
Net Weight	12 kg (26.5 lb)	


Note: All specifications mentioned above are subject to the actual product.

Physical Interfaces

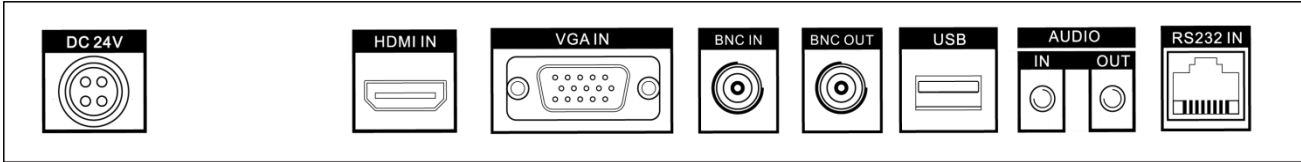

Interface	Description
DC 24V	24 VDC power input
HDMI IN	HDMI digital signal input
VGA IN	Analog VGA input
BNC IN	BNC input
BNC OUT	BNC output
USB	USB interface
AUDIO IN	Audio input
AUDIO OUT	Audio output
RS232 IN	RS-232 communication interface

Dimensions (unit: mm)

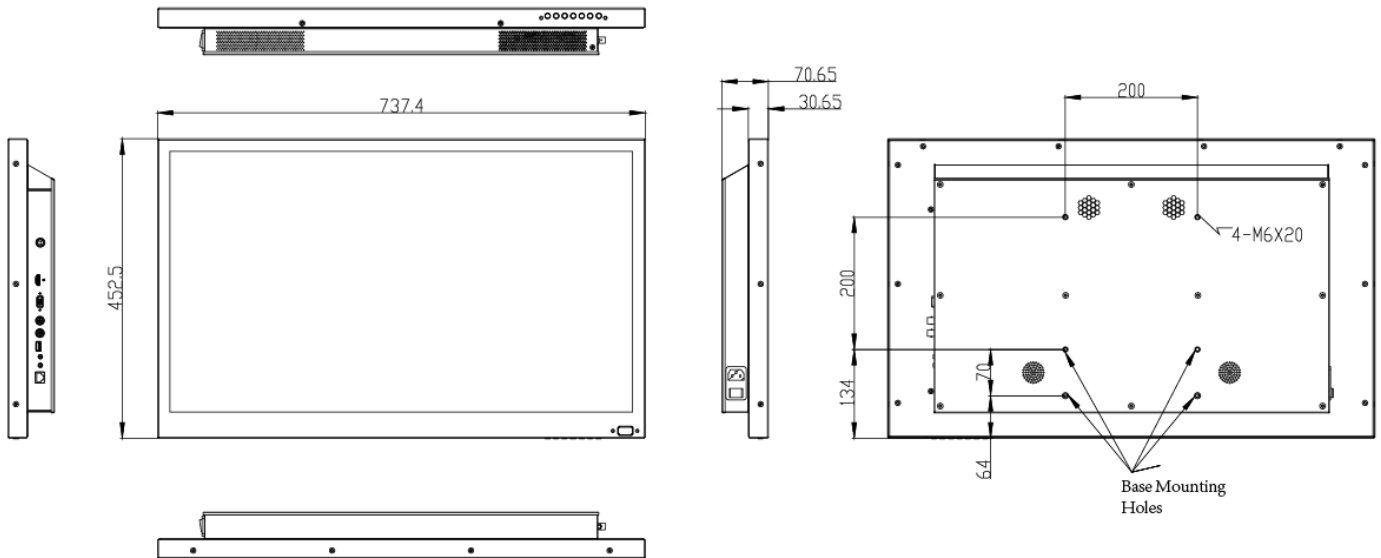

Available Models

DS-D5032FL-B

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761