

DS-K1F600-D6E Series Enrollment Station

The enrollment station can realize multiple user information's enrollment on one device. It supports enrolling face picture, fingerprint (parts of the device model support), 13.56 MHz IC card No., and 125KHz ID card No.



Available Models

- DS-K1F600-D6E
- DS-K1F600-D6E-F

Features

- 3.97-inch LCD touch screen for face recognition, parameters configuration, live view, etc.
- 2 MP wide-angle dual-lens
- Face anti-spoofing
- Face recognition distance: 0.3 m to 1.5 m
- Deep learning algorithm
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- 2,000 user capacity, 2,000 face capacity, 20,000 card capacity, and 20,000 fingerprint capacity
- Enrolls data via the device and transmits the data from the device to the platform via TCP/IP protocol
Enrolls data remotely via the client software
- Stand-alone operation
- Manage, search and set device data after logging in the device locally




Specifications

Model		DS-K1F600-D6E	DS-K1F600-D6E-F
System	Operation system	Linux	
Screen	Dimensions	3.97 inch	
	Resolution	800 × 480	
	Type	Capacitive	
	Operation method	Touch	
Video	Pixel	2 MP	
	Lens	2	
	WDR	Support	
	Video standard	PAL/NTSC	
Audio	Audio output	Support	
	Volume adjustment	Support	
Network	Wired network	TCP/IP	
	Wi-Fi	Support	
Interface	Power interface	Round	
	USB	1	
	PSAM card	Reserved	
Capacity	User capacity	2000	
	Card capacity	20,000 (The displayed capacity on the device screen varies according to the configured enrollment rules)	
	Face capacity	2000	
	Fingerprint capacity	/	20,000 (10 fingerprints per person)
	Event capacity	2000 offline enrollment records	
Authentication	Card type	EM card and Mifare 1 card	
	Card reading frequency	13.56MHz, 125KHz	
	Card reading distances	0 to 5 cm	
	Face recognition distance	0.3 m to 1.5 m	
Function	Face anti-spoofing	Support	
	Audio prompt	Support	
	M1 card encryption	Support	
	Time synchronization	Support	
Others	Supplement light	Support	
	Indicator	Not support	
	Power supply	12 VDC, 15 W	
	Working temperature	-10 °C to 50 °C (14 °F to 122 °F)	
	Working humidity	10% to 90%	

Model		DS-K1F600-D6E	DS-K1F600-D6E-F
	Dimensions	121.6 mm × 137.9 mm × 125 mm (4.8" × 5.4" × 4.9")	
	Application environment	Indoor	
	Weight	0.5 kg (1.1 lb)	
	Installation	Base mounting	

Dimensions

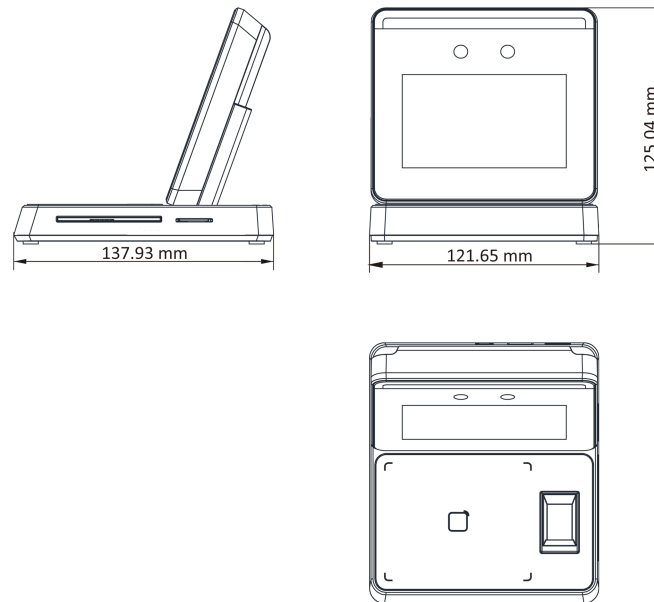

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com