

DS-D6055UN-B

Indoor Wall-mounted Digital Signage

Introduction

Digital Signage is used to broadcast information, release news, advertise products, etc., which is widely applicable to industries of entertainment, finance, traffic, etc.



Key Feature

- **Metallic Appearance**
Light weight body and ultra-narrow border with integrative quadrilateral design. Supports horizontal and vertical installation.
- **Exquisite Image**
Industrial A+ panel, auto-coloring and image-enhancing engine.
- **Various Material Types**
Supports static and dynamic materials, including the application, pictures, audio, video, PDF, streaming media, webpage, live video, third-party data, etc.
- **Flexible Program Schedule**
 - Free schedule and district display of multiple materials.
 - Multiple play modes with customization support.
- **Centralized Management**
 - Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, timed brightness/volume adjustment, and screenshot preview.
 - Remote program release and local (USB) program update.
- **Organization Permission**
 - 5-level organization available for managing materials, programs, terminals, and users.
 - Create custom user with precise permission assignment. Multiple permission templates available.
- **Multiple Security Safeguards**
 - 3-level check of materials, programs, and schedules to prevent mistake release.
 - Screensaver to secure safe for broadcast contents.
 - Encryption of data storage and transmission to avoid data tampering.
 - With no default password, users can activate and set initial password to guarantee the password safety.
- **Center Remote Control**
Infrared receiver in the screen center provides convenient remote control.
- **Preeminent Structure**
 - Built-in slot antenna ensures strong signal.
 - Fan-less design provides silent and energy-saving operation.

Available Model

DS-D6055UN-B





Specifications




	Model	DS-D6055UN-B
Display Parameter	Screen size	54.64 inch
	Active display area	1209.6 mm(H) × 680.4 mm(V)
	Backlight	LED backlight
	Pixel pitch	0.315 mm × 0.315 mm
	Resolution	3840 × 2160
	Brightness	380 cd/m ²
	Viewing angle	Horizontal: 178°, vertical: 178°
	Color depth	10 bit
	Contrast ratio	1200: 1
	Response time	8 ms
	Refresh rate	60 Hz
	Color gamut	72% NTSC
	Reliability	7×24 H
System Configuration	Operation System	Android6.0.1
	CPU	Cortex-A17, 4-core
	Memory	2 GB
	Built-in storage	8 GB EMMC built-in, 32 GB TF Card
Interface	Video & audio input	AUDIO IN (3.5 mm)
	Video & audio output	AUDIO OUT (3.5 mm)
		Built-in speaker 8Ω 5W×2
	Network interface	RJ45 LAN Network interface
		SIM card (only for 3G/4G device)
		Wi-Fi
	Data transmission interface	USB
		TF Card
Bluetooth		
General	Material type	Picture (Maximum resolution 3840 × 2160) : BMP/JPG/PNG/GIF

	Model	DS-D6055UN-B
		Video: ASF/AVI/MPG/3GP/MOV/MKV/WMV/FLV/MP4/RM/RMVB Audio: MP3/WAV/WMA Document: TXT/PDF Webpage: HTML/HTM APP: APK
	Power supply	100 to 240 VAC, 50/60 Hz
	Power consumption	≤ 150 W
	Standby consumption	≤ 10 W
	Working temperature	0°C to 40°C
	Working humidity	10%to 90%
	Net weight	21 kg
	Gross weight	24 kg
	Product dimensions	1237.2 mm(W) × 708 mm(H) × 82.04 mm(D)
	Package dimensions	1403 mm(W) × 898 mm(H) × 263 mm(D)
	Packing list	Remote Control × 1, Installation Guide × 1,Expansion bolt package × 6, Power Cord × 1

Appearance

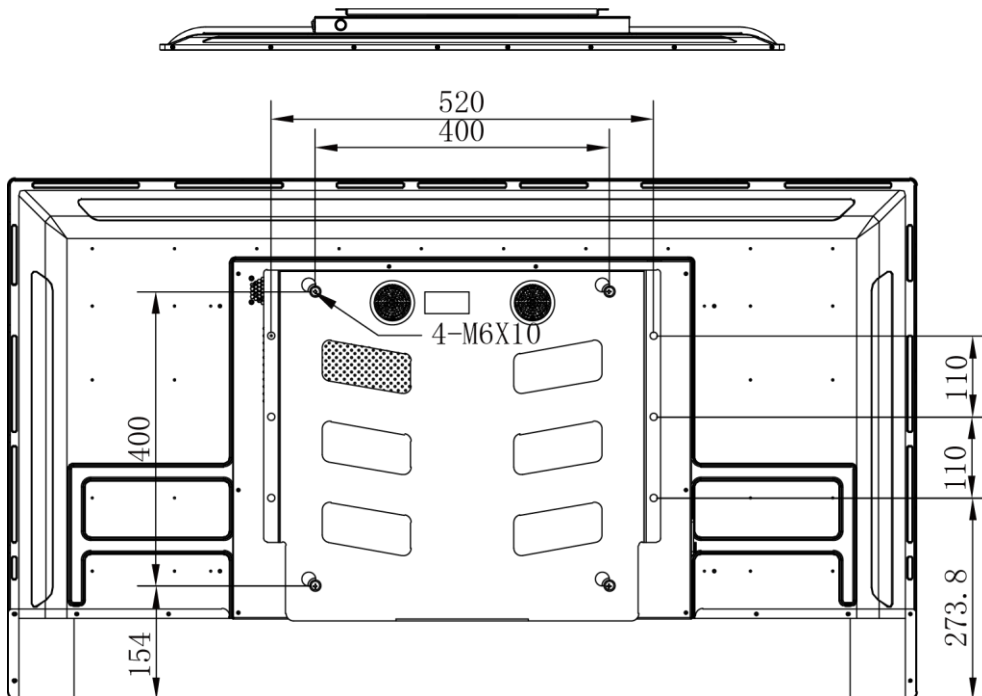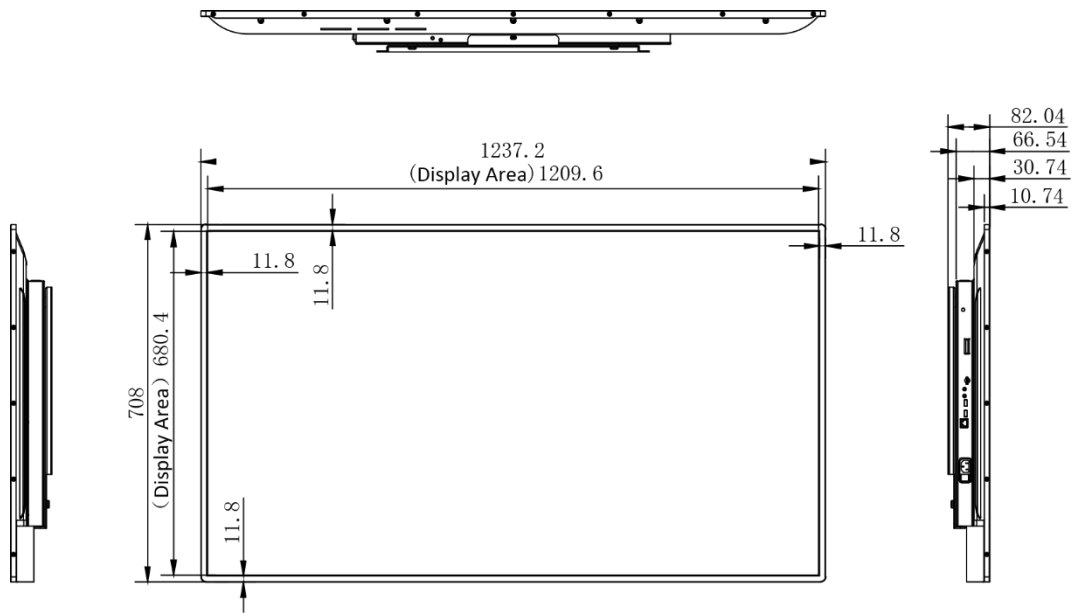


Physical Interfaces




Interface	Description
SWITCH	Power switch.
100-240V	Power supply.
LAN	Network interface.
USB	2 × USB 2.0 interface.
AUDIO IN	Audio input.
AUDIO OUT	Audio output.
TF	TF card slot
SIM	SIM card slot (only 3G/4G device).

Accessory

Model	Material Code	Description	Product Picture
DS-D60S-B	302501440	Information release Server	

Typical Application

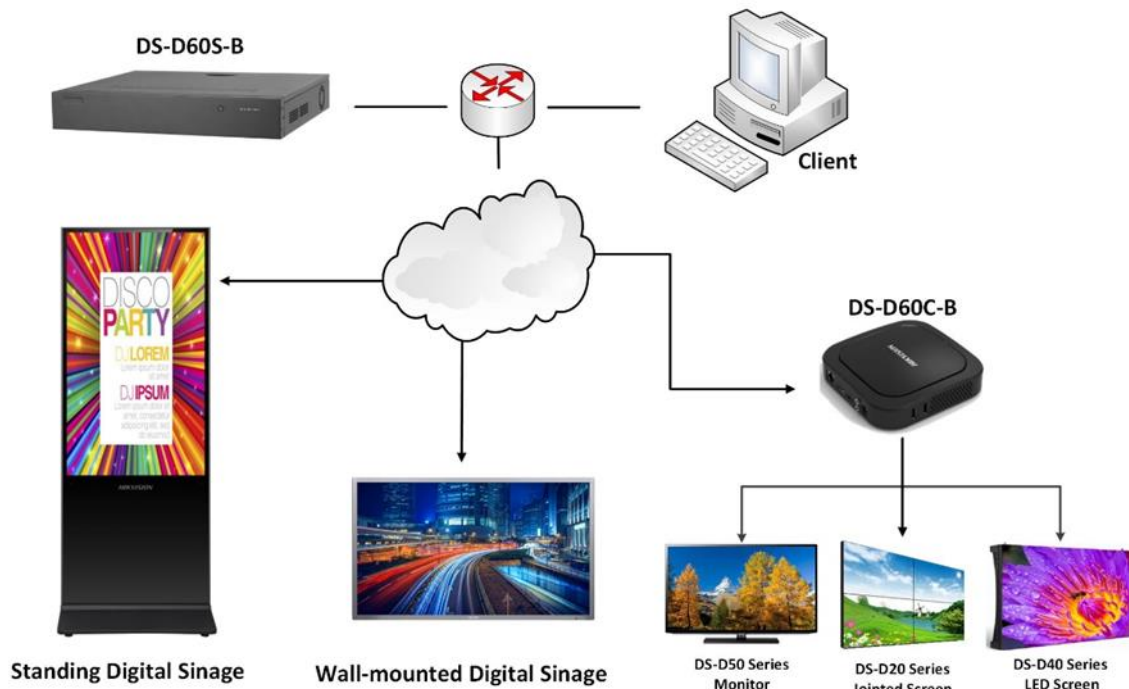

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com