

DS-D60S-B Series Digital Signage Server



Features and Functions

Hardware Structure

- 2U standard chassis, and suits various needs of information delivery system
- Standard rack-mount design and carrier-grade ATCA chassis system
- Smart heat dissipation to ensure stable system running
- Expandable built-in HDD interfaces

Programs and Schedules

- Scheduled programs playing by day/week/custom time
- Configurable play items, playlists and play plans.
- Program and materials inter-cut
- Programs playing in terminal groups
- Supports uploading, downloading, revising, and deleting programs and schedules
- Programs and schedules configured to sharing/private

Terminals Management

- Add terminals by MAC address
- Remote reboot and shutdown of terminals

Multi-Level Management

- Multi-level user management with different permissions authorized
- Supports material and programs sharing

Materials Management


- Various materials support in pictures, audio files, video files, PDF files, HTML, dynamic webpages, rolling subtitles, live broadcasting, third-party data, etc.

Operation and Maintenance

- Built-in gigabyte (GB) network interface
- Remote parameters view and configuration, and configuration file importing and exporting
- Remote view of system operation status and system logs
- Remote system reboot, default settings restoration and upgrade



Physical Interfaces

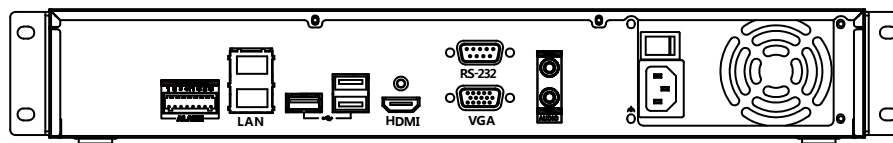

Specifications

Model	DS-D60S-B	
Hard drive	Type	4 SATA interfaces for 3.5-inch HDD
	Capacity	500 MB/1TB/2TB/2TB/4TB/5TB/6TB for each disk
External interfaces	Network	3 x RJ-45 10/100 Mbps self-adaptive Ethernet interface
	Serial interface	1 x RS-232 serial interface
	USB interface	1 x USB 3.0 2 x USB 2.0
General	Power supply	100 to 240 VAC
	Power consumption (hard disk excluded)	≤ 35 W
	Working temperature	0 to 45 ° C (32 to 113 ° F)
	Working humidity	10 to 90 % (non-condensing)
	Chassis	19-inch standard 2U chassis
	Dimensions	445 x 470 x 90 mm
	Weight (without hard disk)	≤ 8 kg

Available Models

DS-D60S-B

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761